



# 4100 (90°) Spec Sheet

## 4100 Series (90°) Series Pump Features:

- 4100 series 90° T&E cast housing w/ 5" inlet & outlet
- 5" steel weld flange
- 7.25" helical cut, nitrided steel gear
- Requires a minimum 4" hose & fitting

## Part Number:

- 214RW      5" T&E 90° cast housing/steel gears/combo caps


## Horsepower Requirements:

- Hydraulic Motor 50-60 hp
- Electric Motor 20 hp 440 VFD

## Recommended Operating Procedures:

- Maximum Temp: 212°F
- Maximum RPM: 850 RPM at the pump
- Maximum Pressure: 125 PSI
  - Pump pressure is maximum safe operating pressure not the maximum pressure the pump will produce

## T&E Pumps 4100 (180°) Flow Chart Litres/min

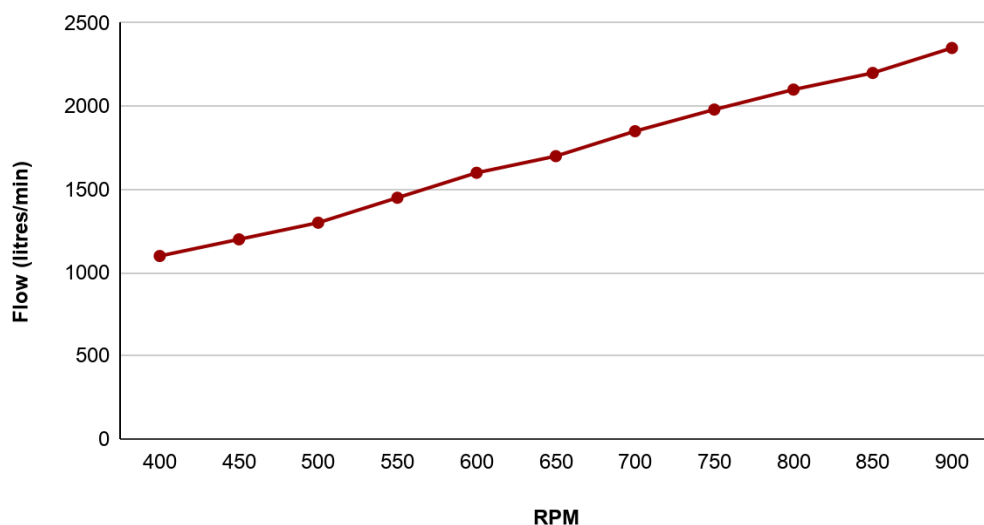

\*Based on optimal conditions 20°C / 68°F Water